
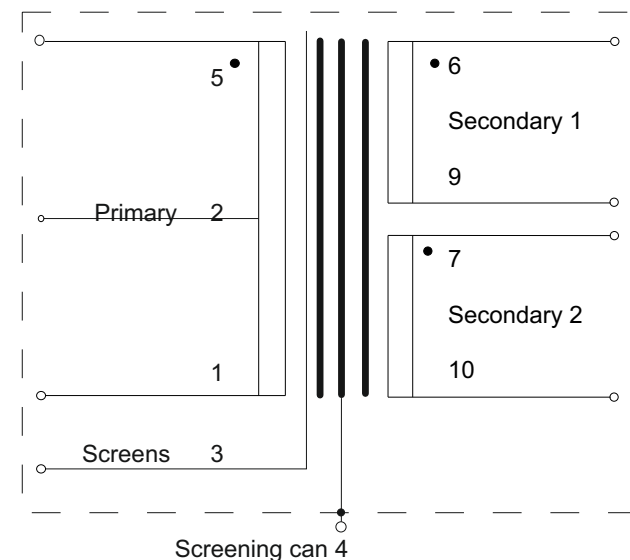
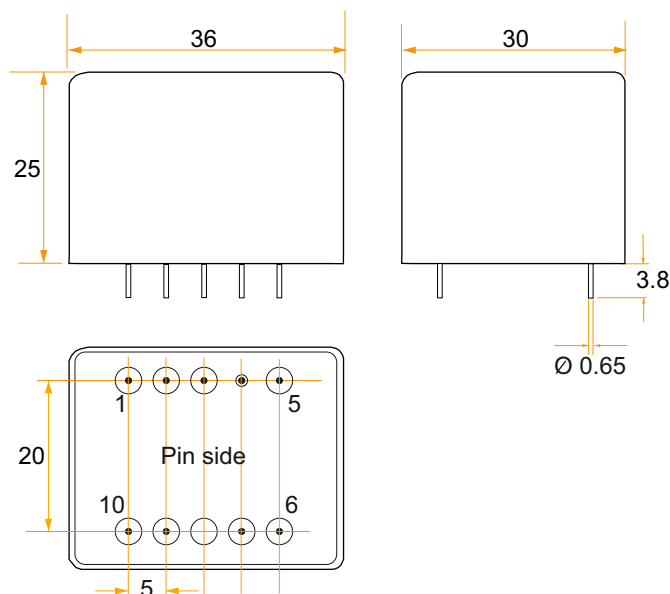


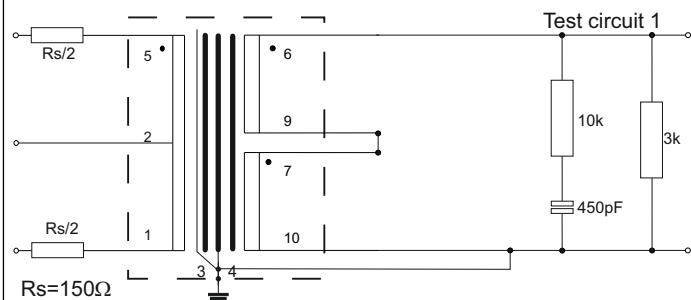

Specification: test circuit 1

Turns ratio: 1 C.T. to 1

DC resistance (Ω +/-15%)

Primary (5 - 1): 24

Secondary (6 - 10): 24 (7+9 linked)

Input impedance (Ω): 2.85k (typ.) @ 1kHz

Output impedance (Ω): 150 Ω (typ.) @ 1kHz

Voltage gain @ 1kHz, 0dBu: -0.59dBu (typ.)

Maximum input @ 20Hz, <1% THD: 8dBu (typ.)

Insertion loss: 0.1dB (typ.)

Leakage inductance (5 - 1) @ 1kHz: = 575uH (typ.)

Capacitance @ 10kHz, 0.1V:

C_{p-s} : 100pF (typ.) or 5pF (typ.) with screen earthed

C_{p-scr} : 120pF (typ.)

C_{s-scr} : 150pF (typ.)

Applications:

High performance microphone input transformer
Input +8dBu max (20Hz) <1%THD

Fitted with multiple electrostatic screens
Low distortion Mu-metal core

Mu-metal screening can reduces electrical noise
by up to 30dB

Hi-pot, primary to secondaries: 500VDC
Windings to screens+can: 500VDC

Operating temperature range: 0 to +70°C
Storage temperature range: -25°C to +120°C

Mass = 0.11kg
Tolerance on can dimensions: +/- 0.5mm



vigortronix

VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580


www.vigortronix.com



Scale: nts

DESCRIPTION





150 Ω microphone input transformer
1 C.T. to 0.5 + 0.5
page 1 of 2



Third Angle Projection

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	13/11/24	CS		VTX-MIC11
2	15/04/25	CS		

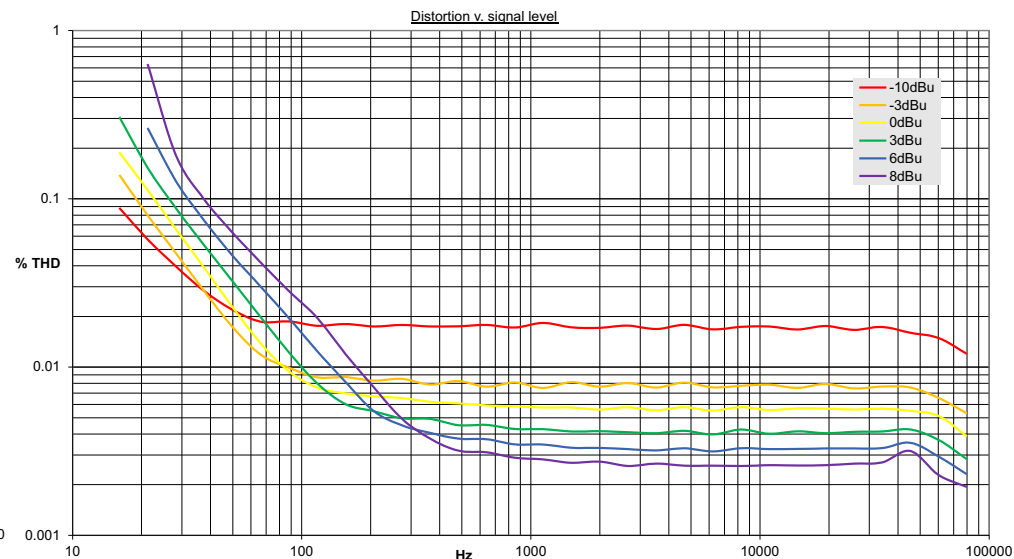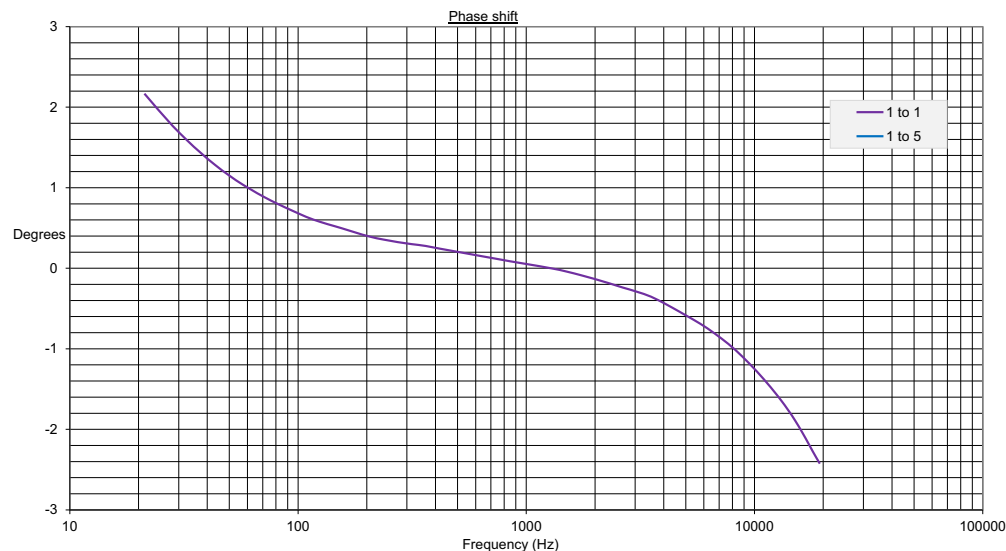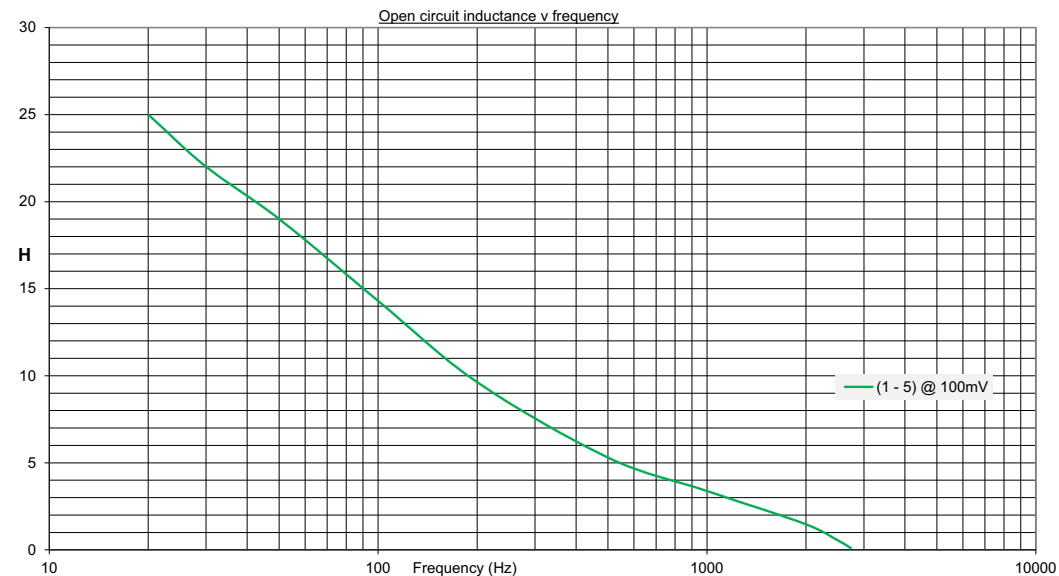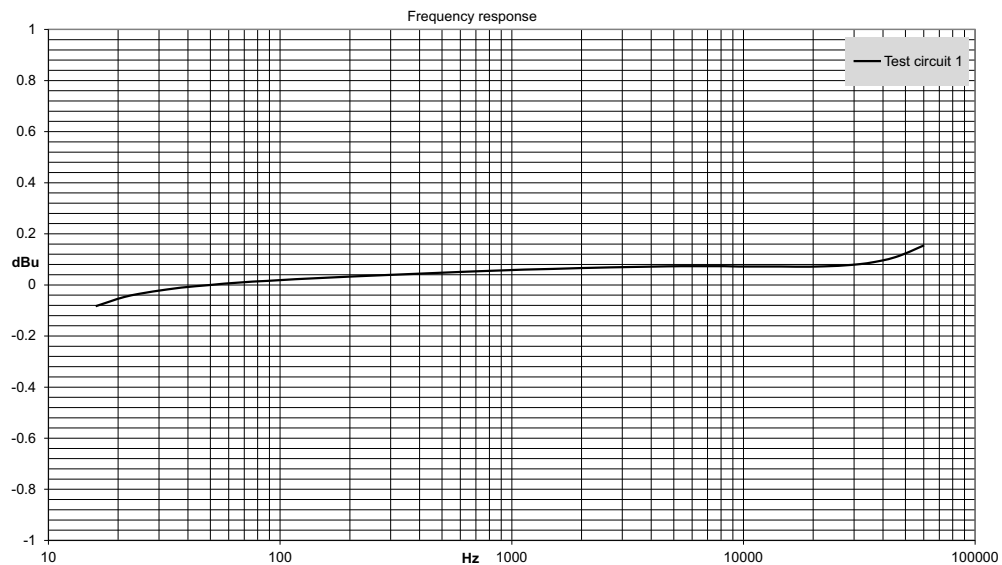

vigortronix

VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580
www.vigortronix.com

DESCRIPTION

150Ω microphone input transformer
1 C.T. to 0.5 + 0.5
page 2 of 2

Scale: nts

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	13/11/24	CS		VTX-MIC11
2	15/04/25	CS		