

Pin diameter 0.7mm (0.0276)

Tolerance on dimensions in mm: +/- 0.1 unless stated otherwise.

Inches shown in brackets.

Tolerance on dimensions in inches: +/- 0.005" unless stated otherwise.

Applications:

High performance moving coil transformer

1 + 1 : 20 C.T. Winding Ratio

30 - 100 Ohm

Fitted with multiple electrostatic screens

Low distortion Mu-metal core

Mu-metal screening can reduces electrical noise

by up to 30dB

Hi-pot, primary to secondaries: 500VDC


Windings to screens+can: 500VDC

Operating temperature range: 0 to +70°C

Storage temperature range: -25°C to +120°C

Mass = 0.06kg

Tolerance on can dimensions: +/- 0.5mm

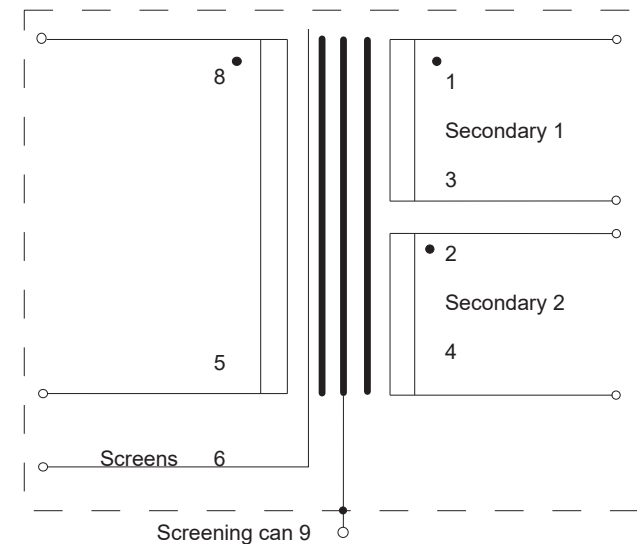

Product in Development

Contact audio@vigortronix.com for further information




vigortronix

VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580

www.vigortronix.com

DESCRIPTION	
RoHS COMPLIANT	1 + 1 : 20 C.T. (Z: 30 - 100 Ohm) PCB mounting 2 transformers required for stereo
Scale: nts	All dimensions in mm unless stated otherwise



ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	27/04/25	CS		VTX-MC1