


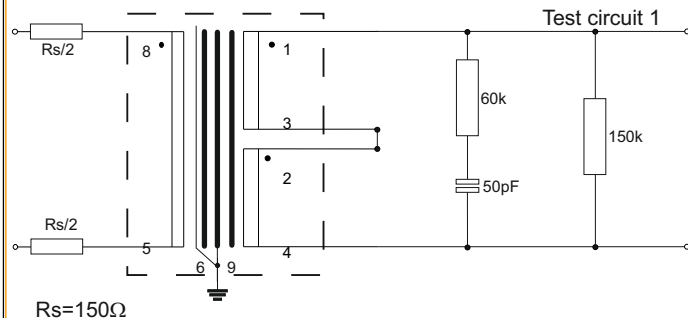

Specification (test circuit 1):
Turns ratio: 1 to 10 (series)

DC resistance (Ω +/-15%)
Primary (8 - 5): 19
Secondary (1 - 4): 2040

Input impedance (Ω): 1.35k Ω (typ.) @ 1kHz
Output impedance (Ω): 19.4k Ω (typ.) @ 1kHz


Voltage gain @ 1kHz, 19.07dBu (typ.)

Maximum input @ 20Hz, <1% THD: 0dBu

Insertion loss: 0.2dB (typ.)

Leakage inductance @ 1kHz: (8 - 5) (1/2/3/4 S/C) 90mH (typ.)

Capacitance @ 10kHz, 0.1V:
 C_{p-s} : 68pF (typ.) or 8pF (typ.) with screen earthed
 C_{p-scr} : 140pF (typ.)
 C_{s-scr} : 120pF (typ.)

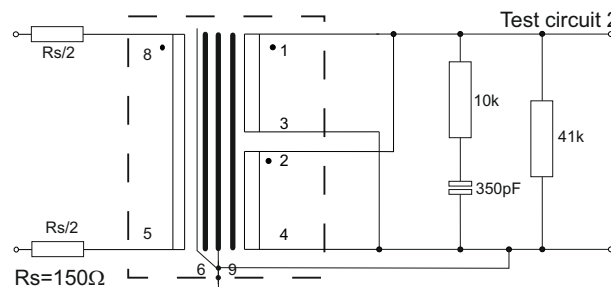

Specification (test circuit 2):
Turns ratio: 1 to 5 (parallel wired)

DC resistance (Ω +/-15%)
Primary (8 - 5): 19
Secondary (parallel) ((1+2) - (3+4)): 507

Input impedance (Ω): 1.5k Ω (typ.) @ 1kHz
Output impedance (Ω): 4.8k Ω (typ.) @ 1kHz



Voltage gain @ 1kHz, 12.94dBu (typ.)

Maximum input @ 20Hz, <1% THD: 0dBu

Insertion loss: 0.2dB (typ.)

Leakage inductance @ 1kHz: (8 - 5) (1/2/3/4 S/C) 58mH (typ.)

Capacitance @ 10kHz, 0.1V:
 C_{p-s} : 68pF (typ.) or 8pF (typ.) with screen earthed
 C_{p-scr} : 140pF (typ.)
 C_{s-scr} : 120pF (typ.)

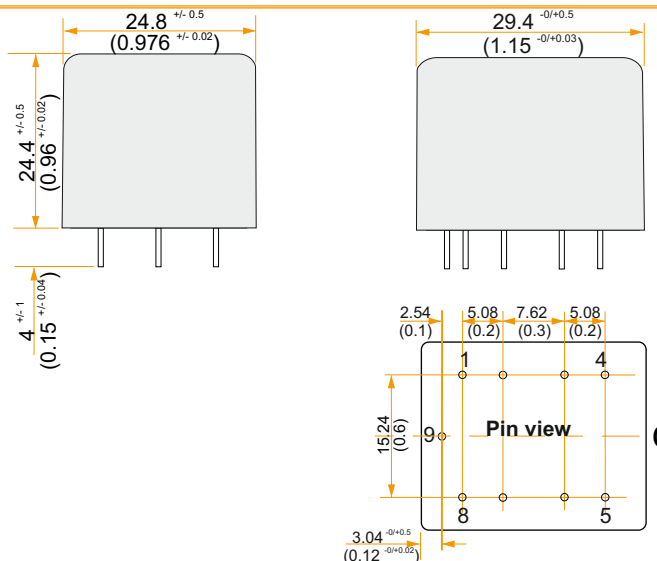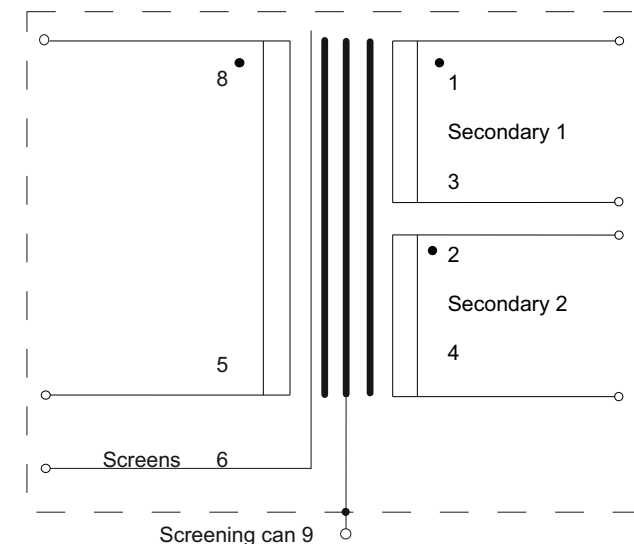

Pin diameter 0.7mm (0.0276)

Tolerance on dimensions in mm: +/- 0.1 unless stated otherwise.

Inches shown in brackets.

Tolerance on dimensions in inches: +/- 0.005" unless stated otherwise.

Application:
Microphone input transformer

Input impedance: 150 ohms

Input 0dBu max. (@ 20Hz) <1%THD

Frequency response 1 to 5: +/-0.2dB (20Hz - 35kHz)

Hi-pot, primary to secondaries: 500VDC
Windings to screens+can: 500VDC

Fitted with multiple electrostatic screens

Low distortion Mu-metal core

Mu-metal screening can reduces electrical noise by up to 30dB

Operating temperature range: 0 to +70°C
Storage temperature range: -25°C to +120°C

Mass = 0.055kg



vigortronix


VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580

www.vigortronix.com



Scale: nts



DESCRIPTION
150 Ω microphone input transformer
1 to 5+5
page 1 of 2



Third Angle Projection

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	18/11/24	CS		VTX-MIC5
2	08/04/25	CS		

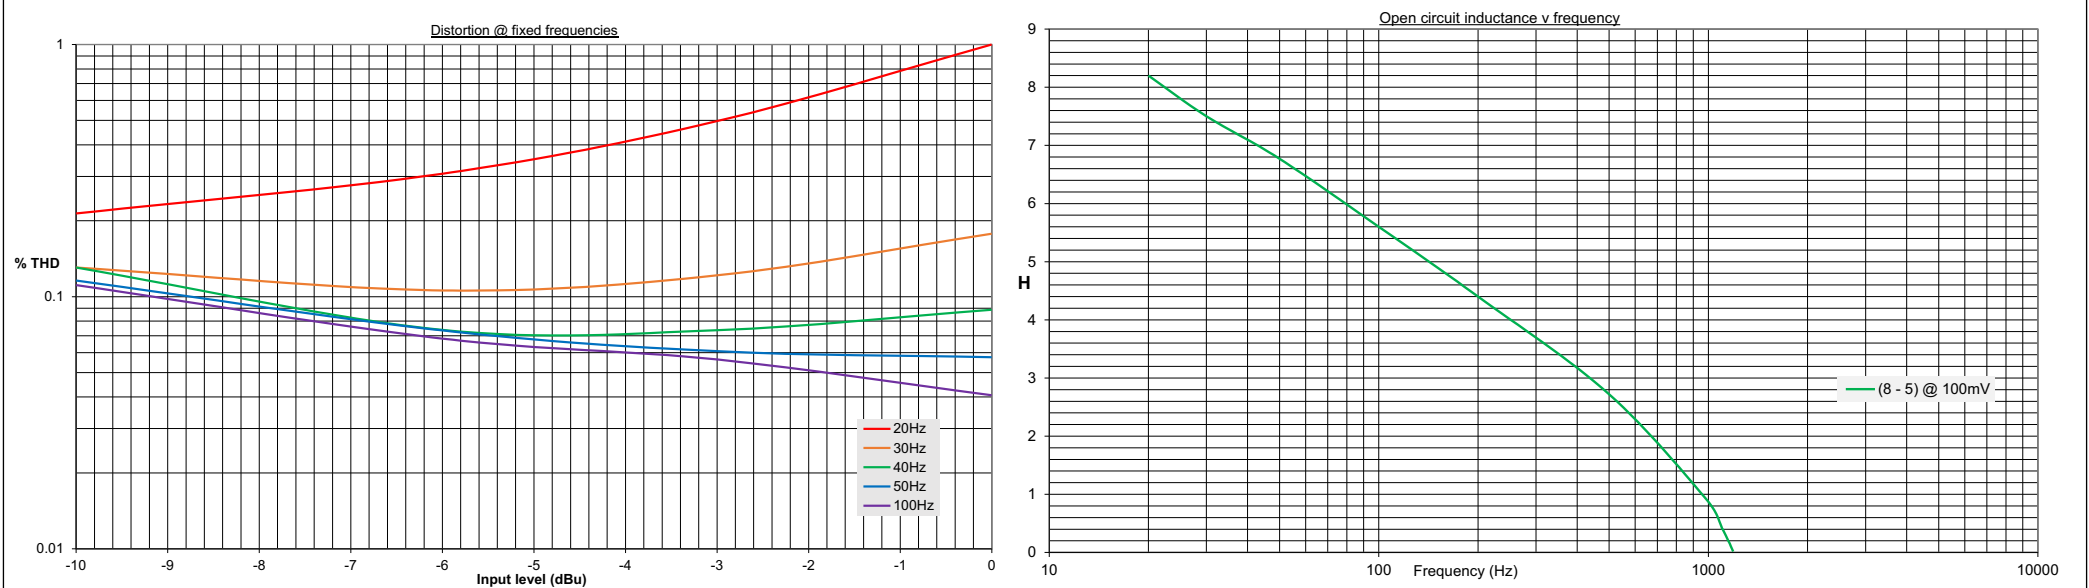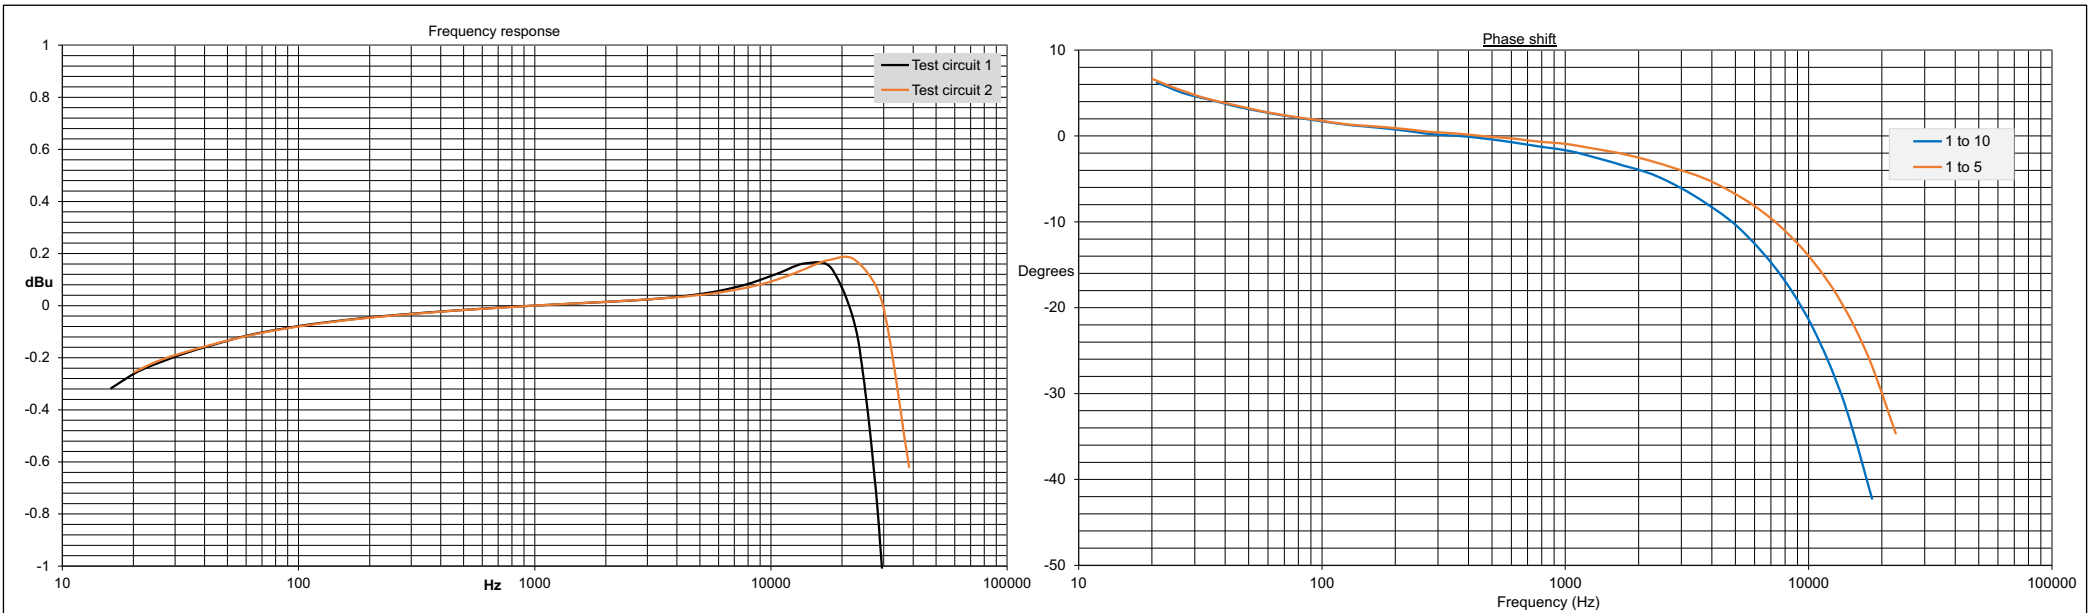

 vigortronix VIGORTRONIX LTD 16 De Havilland Way Windrush Park, Witney Oxon, OX29 0YG, UK Tel: +44 (0)1993 777570 Fax: +44 (0)1993 777580 www.vigortronix.com	DESCRIPTION		ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
	150Ω microphone input transformer 1 to 5+5 page 2 of 2		1	18/11/24	CS		VTX-MIC5
			2	08/04/25	CS		
	Scale: nts		All dimensions in mm unless stated otherwise				