

Applications:

Microphone splitting transformer 9 dBu

1 : 1 : 1 : 1 Winding Ratio
150 Ohm


Fitted with multiple electrostatic screens
Low distortion Mu-metal core

Mu-metal screening can reduce electrical noise
by up to 30dB

Hi-pot, primary to secondaries: 500VDC
Windings to screens+can: 500VDC

Operating temperature range: 0 to +70°C
Storage temperature range: -25°C to +120°C

Mass = 0.24kg
Tolerance on can dimensions: +/- 0.5mm

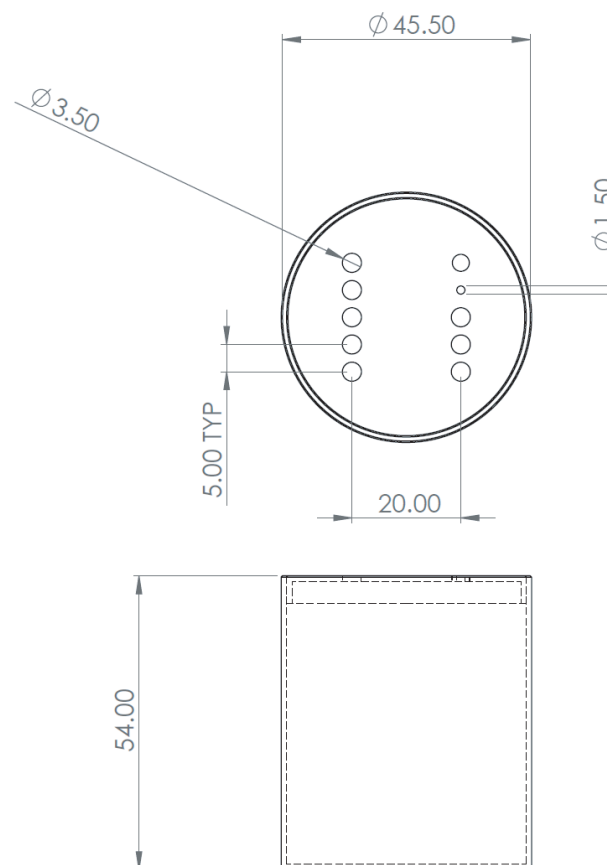

Product in Development

Contact audio@vigortronix.com for further information



vigortronix


VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580
www.vigortronix.com



Scale: nts

DESCRIPTION

1 : 1 : 1 : 1 150 Ohm 9dBu MIC
SPLITTING TRANSFORMER chassis
mounting



Third Angle Projection

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	27/04/25	CS		VTX-MICB23